

ЕКОЛОГІЧНА БЕЗПЕКА ОТОЧУЮЧОГО СЕРЕДОВИЩА

УДК 621.43.068

A. P. POLIVYANCHUK, D-r of Techn. Sciences, Prof.
O.M. Beketov National University of Urban Economy in Kharkiv
17, Marshal Bazhanov Street, Kharkiv, 61002, Ukraine
e-mail: apmail@meta.ua

THE CONCEPT OF CREATING UNIVERSAL SYSTEMS FOR THE ENVIRONMENTAL CERTIFICATION OF TRANSPORT DIESELS BASED ON MINI- AND MICROTUNNELS

Purpose. Creation of a scientific and practical basis for the development on the basis of mini and micro tunnels of universal low-cost systems for the environmental certification of transport diesel engines in terms of the mass emission of particulate matter with exhaust gases. **Methods.** Analysis and synthesis of information when studying the systems of ecological certification of diesel engines, physical and mathematical modeling, experimental research of working processes, technical characteristics and efficiency indicators of tunnels. **Results.** The technical characteristics of mini and micro-tunnels as control systems for mass emissions of diesel particulate matter are considered. The concept of the creation of universal mini- and microtunnels is proposed based on the principles of increasing their compactness, dynamism, management efficiency and accuracy. **Conclusions.** The results of theoretical and experimental researches and developments on increasing the universality of mini- and microtunnels are presented: mathematical models of work processes, resulting errors and performance indicators of tunnel; new isokinetic and compensation methods for controlling exhaust gas samples; prototypes of a minitunnel with an isokinetic sampler MT-1, microtunnels MKT-1 and MKT-2; test benches for studies of thermal processes in tunnels, isokinetic and compensation sampling regimes; results experimental development of certification procedures for measuring emissions of particulate matter from automotive, tractor and diesel locomotives.

Keywords: diesel, exhaust gases, solid particles, environmental certification, minitunnel, microtunnel, universality

Полив'янчук А. П.

Харківський національний університет міського господарства імені О.М. Бекетова

КОНЦЕПЦІЯ СТВОРЕННЯ НА БАЗІ МІНІ- ТА МІКРОТУНЕЛІВ УНІВЕРСАЛЬНИХ СИСТЕМ ЕКОЛОГІЧНОЇ СЕРТИФІКАЦІЇ ТРАНСПОРТНИХ ДИЗЕЛІВ

Мета. Створення науково-практичної бази для розробки на базі міні- та мікротунелів універсальних недорогих систем екологічної сертифікації транспортних дизелів за показником масового викиду твердих частинок з відпрацьованими газами. **Методи:** Аналіз та синтез інформації, фізичне та математичне моделювання, експериментальні дослідження. **Результати.** Запропоновано концепцію створення універсальних міні- та мікротунелів на основі принципів підвищення їх компактності, динамічності, ефективності керування і точності вимірювального обладнання. **Висновки.** Представлено результати теоретичних та експериментальних досліджень та розробок щодо підвищення універсальності міні- та мікротунелів: математичні моделі робочих процесів, нові методи контролю проби, макетні зразки вимірювачів MT-1, MKT-1, MKT-2, тощо.

Ключові слова: дизель, відпрацьовані гази, тверді частинки, екологічна сертифікація, мінітунель, мікротунель, універсальність

Поливянчук А. П.

Харьковский национальный университет городского хозяйства имени А.Н. Бекетова

КОНЦЕПЦИЯ СОЗДАНИЯ НА БАЗЕ МИНИ- И МИКРОТУННЕЛЕЙ УНИВЕРСАЛЬНЫХ СИСТЕМ ЭКОЛОГИЧЕСКОЙ СЕРТИФИКАЦИИ ТРАНСПОРТНЫХ ДИЗЕЛЕЙ

Цель. Создание научно-практической базы для разработки на базе мини- и микротуннелей универсальных недорогих систем экологической сертификации транспортных дизелей по показателю массового выброса твердых частиц с отработавшими газами. **Методы.** Анализ и синтез информации, физическое и математическое моделирование, экспериментальные исследования. **Результаты.** Предложена концепция создания универсальных мини- и микротуннелей на основе принципов повышения их компактности, динамичности, эффективности управления и точности. **Выводы.** Представлены результаты теоретичес-

ких и экспериментальных исследований и разработок по повышению универсальности мини- и микротуннелей: математические модели рабочих процессов, новые методы контроля проб отработавших газов, макетные образцы измерителей МТ-1, МКТ-1, МКТ-2 и др.

Ключевые слова: дизель, отработавшие газы, твердые частицы, экологическая сертификация, микротуннель, микротуннель, универсальность

Introduction

Today, when creating transport engines, special attention is paid to their environmental performance, which characterizes the negative impact of these power plants on the environment. This is especially true for diesel engines, which, by their operating principle, are more toxic than gasoline and gas engines.

Among the most dangerous substances contained in the exhaust gases of diesel engines are solid particles (PM), which determine how all the material collected on special filtering means after passing through them exhaust gas diluted with pure air to a temperature not exceeding 52 °C [1].

The mass emission of PM with exhaust gases from diesel engines is a normative pa-

rameter, for the determination of which special measuring systems are used – diluting tunnels, the most effective of which are mini tunnels (MT) and microtunnels (MKT) at their price and convenience in operation.

At the present stage, the ecologization of engine building in the design of tunnels solve the urgent problem of increasing their universality – the possibility of using diesel engines of various types in testing. In order to solve this problem, the author, based on his own experience in the development and operation of tunnels, proposed the concept of creating universal systems for the environmental certification of transport diesel engines based on MT and MKT.

Object and methods of research


General characteristics of the layout schemes of mini and microtunnels.

MT and MKT relate to partial-flow diesel fuel sampling systems, which are more mobile and cheaper than reference full-flow tunnels.

In MT sampling modules – diluting exhaust gas with air and sampling PM for filters have different gas blowers with mass flow rates of 10 ... 50 g/s and 1,2 ... 2,5 g/s, respectively; the dimensions of the dilution tunnel for exhaust gas – the tunnel of these systems - diameter (D) × length (L) are 7.5 ... 10 × 75 ... 100 cm (Fig. 1,a).

In the MKT, the sample preparation and sampling points for PM on the filters are combined into one module with a common gas blower, whose productivity is 1,2 ... 2,5 g/s; this allows to reduce the overall dimensions of the tunnel to $D \times L = 2,5 \dots 4,0 \times 25 \dots 40$ cm (Fig. 1,b).

MT and MKT are used to determine the mass, specific and average operating PM emissions during arbitrary, research and certification tests of diesel engines, which are carried out in accordance with the requirements of regulatory documents [1-3].

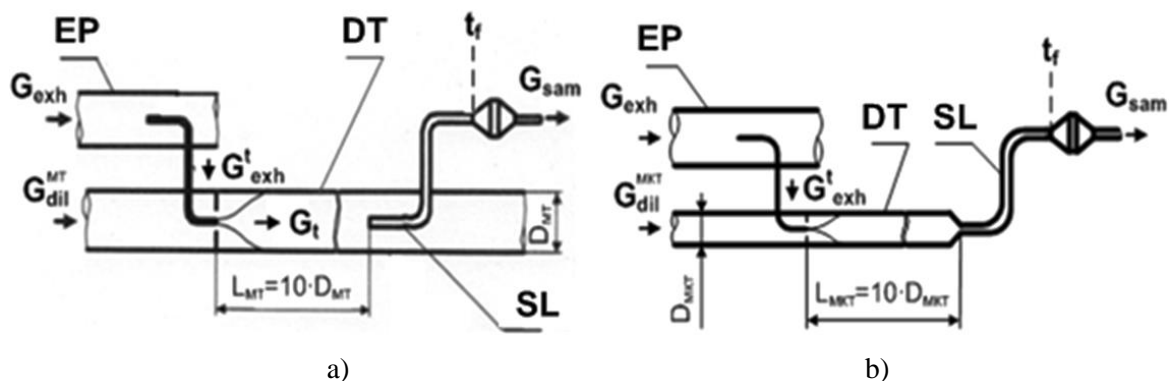

EP – exhaust pipe of a diesel engine; DT – diluting tunnel; SL – sampling line PM
a) minitunnel; b) microtunnel.

Fig. 1 – Schematic diagrams of partial-flow control systems for emissions of diesel PM

The concept of creating universal diesel certification systems based on mini and microtunnels is based on four basic principles:

1) *increase of compactness of equipment* due to minimization of mass-dimensions parameters of tunnels; this will increase their mobility and convenience in operation, reduce the performance of gas blowers, the energy and economic costs of their operation;

2) *increasing the dynamism of the systems for sample preparation and sampling of PM* by using low-inertia methods for monitoring the work processes of these systems; this will enable the use of MT and MKT in performing highly dynamic test cycles – the European Transient Cycle (ETC), the Worldwide

Transient Vehicle Cycle (WTVC), the Worldwide heavy-duty transient cycle (WHTC) and other [4-6];

3) *increasing the accuracy of the gravimetric measurement method* by reducing its instrumental and methodological errors; this will allow to ensure the required accuracy of MT and MKT in conditions of decreasing standards for PM emissions from diesel engines;

4) *modernization of the algorithm of operation and software of tunnels* by taking into account existing and prospective testing procedures for various diesel engines and data processing techniques; this will expand the scope of application of MT and MKT to all types of transport diesels.

Results and discussion

With the purpose of creating a scientific and practical basis for increasing the universality of MT and MKT, the results of theoretical and experimental studies were systematized by specialists of the O.M. Beketov National University of Urban Economy in Kharkiv, National Technical University "Kharkov Polytechnic Institute" and Volodymyr Dahl East Ukrainian National University in the period 2003-2017; the results of the research can be divided into the following groups.

Mathematical models for definition of technical characteristics and efficiency indicators of tunnels:

– *mathematical model of the thermal state of the sample in the tunnel*, which allows to determine the required parameters of the dilution of exhaust gas by air in the tunnel – dilution factor and sample temperature before the filter for the selection of PM [7, 8]; these parameters must comply with the conditions for dilution of exhaust gas in a full-flow tunnel, which eliminates the methodological error of the gravimetric method for controlling diesel emissions of PM;

– *mathematical model for determining the resulting error in the measurement of mass emissions of PM* as a sum of its instrumental and methodological components [9, 10]; this model allows to estimate the accuracy of MT and MKT and to determine the influence of errors in measuring equipment and conditions of dilution of exhaust gas in the tunnel on it;

– *a complex mathematical model for evaluating tunnel efficiency* by three criteria: the accuracy of measurements, the required fuel consumption for testing and the cost of the test procedure [11]; on the basis of this model, op-

timization of technical and operational parameters of MT and MKT can be carried out according to the specified criteria.

New methods for controlling the sample of exhaust gas and the concentration of PM in the tunnel:

– *compensation method for controlling the exhaust gas sample*, which is taken from the diesel exhaust system [12]; this method provides the required accuracy of measurements and is 5 ... 8 times cheaper than the known analogue – the differential method, which is used in the microtunnel AVL SPC 472;

– *the method of dynamic control of PM emissions with an optoelectronic sensor element*, which allows to determine the instantaneous values of PM concentrations in exhaust gas during the operation of the diesel engine under steady and unsteady test conditions [13];

– *method of accelerated measurement of mass emission of PM with exhaust gas of diesel engine*, which allows to determine this environmental indicator with the minimum possible time expenditure, provided that the required accuracy of measurements is provided [14]; this method is most in demand in the ecological diagnostics of dimensional diesel engines – diesel locomotives, ships, etc., whose tests are characterized by considerable fuel costs and have a high cost.

Batch samples of mass emission control systems for PM emissions from diesel engines, which are developed in accordance with the requirements of international standards [1-3]:

– *minitunnel with isokinetic sampler MT-1* (Fig. 2), which has the following technical characteristics: tunnel dimensions – $D \times L = 8,5$

× 100 cm; the capacity of gas blowers: the dilution module of exhaust gas is 25 g/s, the sampling line of PM is 1,2 g/s; the selection regime for exhaust gas is isokinetic [15];

- *microtunnels*: MKT-1 – non-automated system and MKT-2 – automated system (Fig. 3), which have the following technical characteristics: tunnel dimensions - $D \times L = 3,0 \times 30$

cm; the total gas blowing capacity of the exhaust gas dilution module and the PM sampling line – 1,2 g/s; modes of selection of exhaust gases – isokinetic, proportional, constant; MKT-2 control mode – using a PC using specially developed software (Fig. 4) [16,17].

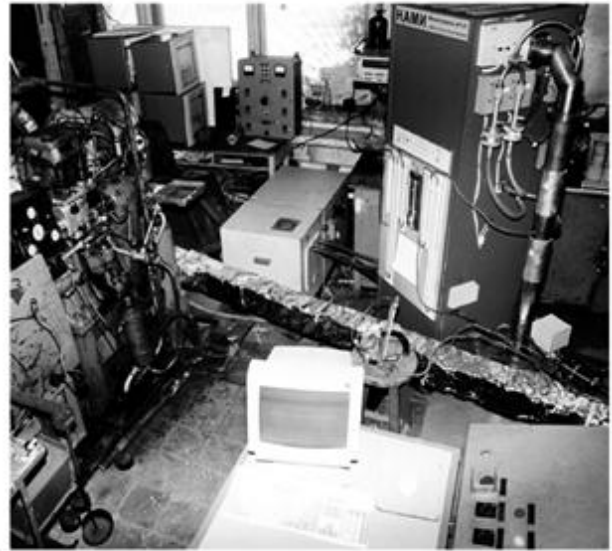
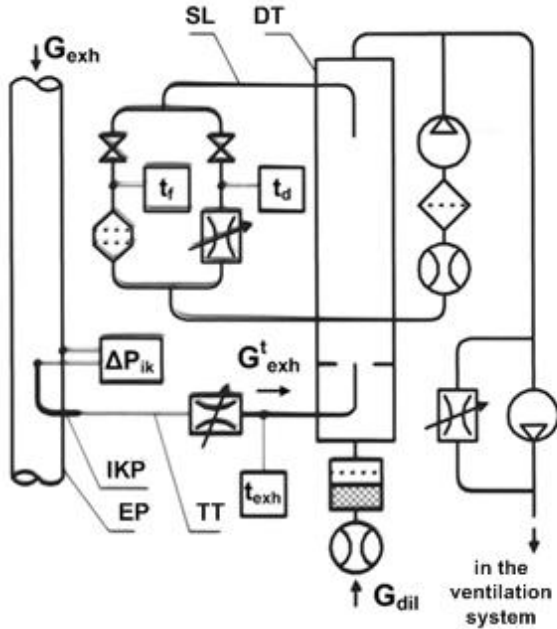


Fig. 2 – Schematic diagram and general view of the MT-1 minitunnel

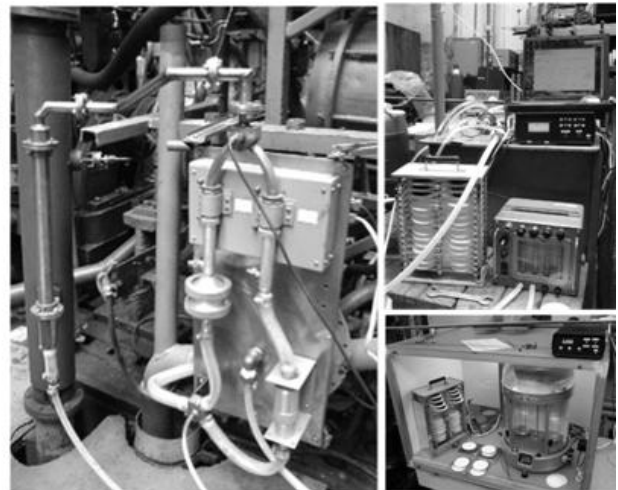
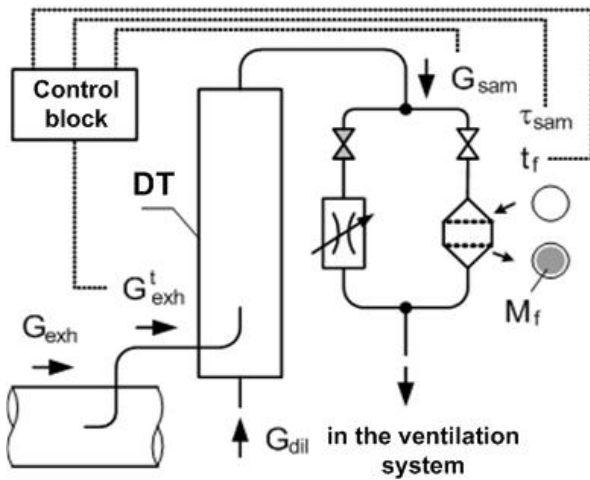


Fig. 3 – Schematic diagram and general view of the microtunnel MKT-2 and its elements

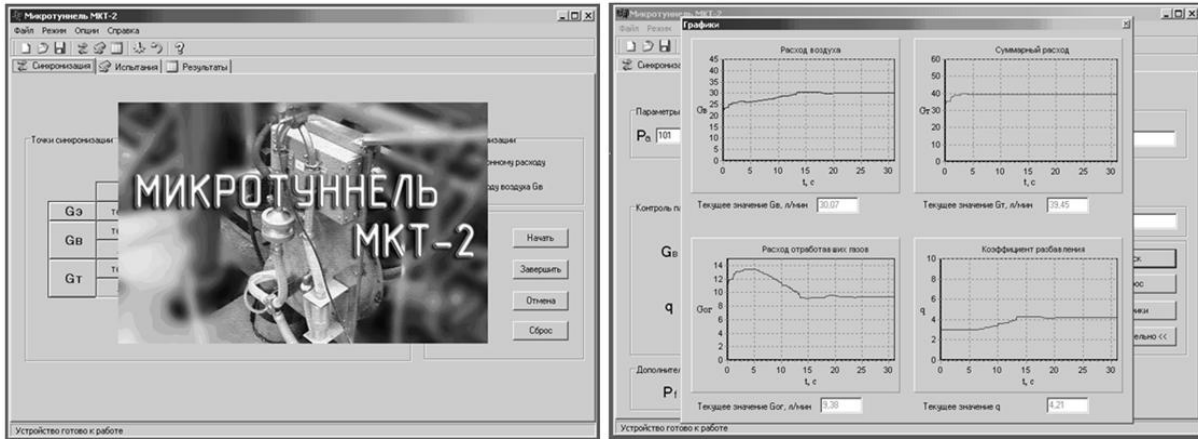


Fig. 4 – Software of microtunnel MKT-2

Test benches for research of working processes in tunnels:

– stand for research of thermal processes in tunnels (Fig. 5); at this stand the process of heat transfer through the wall of the tunnel was investigated and the criterial equation of this process in dimensionless form was established [18];

– a non-motorized stand for studies of the isokinetic and compensation mode of exhaust gas sampling (Fig. 6); at this booth, the conditions for using the isokinetic sampler of the MT-1 mini-tunnel were experimentally determined and confirmed the practical suitability of the compensation method for controlling the sample of exhaust gases [19].

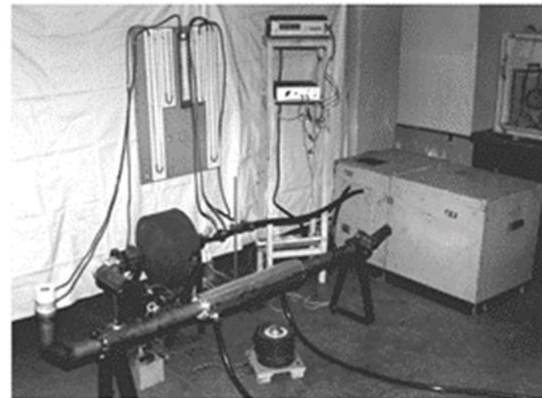
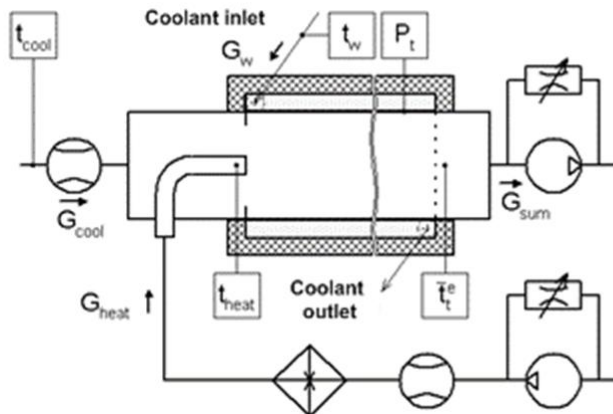


Fig. 5 – Schematic diagram and general view of the stand for studying thermal processes in tunnels

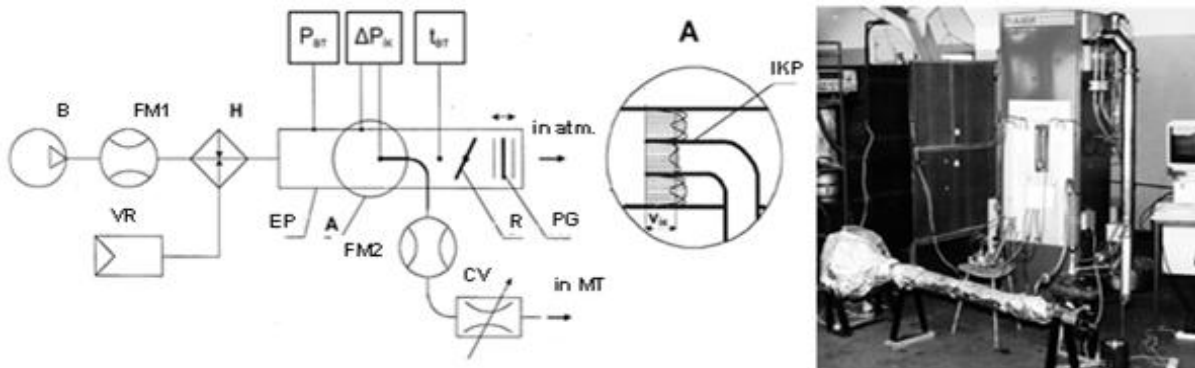


Fig. 6 – Schematic diagram and general view of a non-motorized test bench

The results of experimental testing of the procedures for certification tests of diesel engines: automobile 4CHN12/14 – 13-step R-49 cycle and ESC cycle, tractor D-242 – 8-stage R-96 cycle and diesel 6DN – ISO-8178F and DSTU 32.001-94 cycles (Fig. 7) [20, 21].

Conclusions

1. The concept of creation on the basis of mobile and inexpensive mini and microtunnels of universal systems of ecological certification of transport diesels, which allow to determine the normalized emissions of solids with exhaust gases of automobile, tractor, diesel, marine and other diesel engines, is proposed. At the heart of the concept are the principles of

On the basis of the above research results, a modern domestic measurement system for the environmental diagnosis and certification of transport diesel engines for various purposes on the standardized mass emission of PM can be created based.

increasing the compactness, dynamism, accuracy and efficiency of measuring equipment management.

2. The results of theoretical and experimental research and development, which constitute the scientific and practical basis for increasing the universality of the mini and microtunnels are presented: *mathematical*

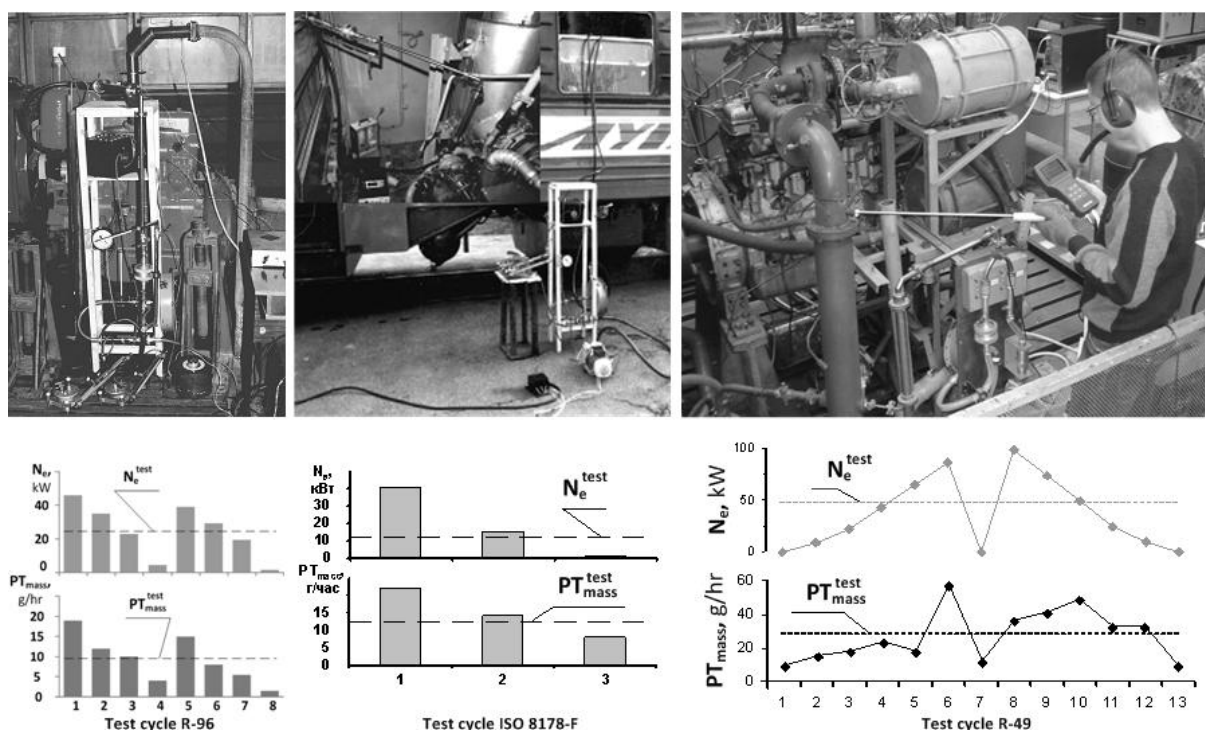


Fig. 7 – Environmental testing of tractor, locomotive and automobile diesels with MKT-1 and MKT-2

models: the resulting error of measurements of the emission of solid particles, the thermal state of the gas sample in the tunnel, the complex estimation of the efficiency of the tunnel by the criteria of accuracy and economic application efficiency; *methods*: compensated sampling of exhaust gases, dynamic control of solid particles using an optoelectronic sensing element, accelerated measurement of particu-

late emissions; *model samples*: miniunnel MT-1 with isokinetic sampler, microtubules MKT-1 and MKT-2, *test benches* for research on tunnel thermal processes, isokinetic and compensatory regimes of exhaust gas sampling, *results of experimental testing of certification procedures* for determination of particulate emissions from automobile, tractor and locomotive diesel engines.

References

1. Regulation No 49. Revision 6 (2013). Uniform provision concerning the approval of compression ignition (C.I.) and natural gas (NG) engines as well as positiveignition (P.I.) engines fuelled with liquefied petroleum gas (LPG) and vehicles equipped with C.I. and NG engines and P.I. engines fuelled with LPG, with regard to

- the emissions of pollutants by the engine. United Nations Economic and Social Council Economic Commission for Europe Inland Transport Committee Working Party on the Construction of Vehicles. E/ECE/TRANS/505, 434.
2. Regulation № 96. Revision 3. (2014). Uniform provision concerning the approval of compression ignition (C.I.) engines to be installed in agricultural and forestry tractors with regard to the emissions of pollutants by the engine. E/ECE/TRANS/505, 416.
 3. ISO 8178-1: 2017. (2017). Reciprocating internal combustion engines. Exhaust emission measurement. Part 1: Test-bed measurement of gaseous and particulate exhaust emissions, 150.
 4. Steven, H. (2001). Development of Worldwide Harmonized Heavyduty Engine Emissions Test Cycle. Final Report ECE-GRPE WHDC Working Group. Informal document No2 GRPE 42nd session. TRANS/WP 29/GRPE/2001/2, 58. [in English].
 5. Anderson, J.D. (2003). UK Particle Measurement Programme. Phase 2. Heavy Duty Methodology Development. Final Report. Ricardo Consulting Engineers Ltd. 222. [in English].
 6. Worldwide Harmonized Heavy Duty Emissions Certification Procedure (2004). Draft Global Technical Regulation (GTR). UN/ECE-WP 29. GRPE WHDC Working Group. Informal Document, GRPE-48-7, 86.
 7. Polivyanchuk, A. (2016). Matematychnye modelyuvannya teplovoho stanu hazovoyi probe v systemakh ekolohichnoho diahnostuvannya transportnykh dvyhunyv. [Mathematical modeling of the thermal state of a gas sample in systems of ecological diagnostics of transport engines]. Bulletin of Kharkiv National University of Karazin. Series «Ecology», 15, 106-112. [in Ukrainian].
 8. Polivyanchuk, A. (2016). Matematicheskoe modelirovanie processa teplotdachi v sisteme ehkologicheskoy diagnostiki teplovoza – razbavlyayushchem tunnele. [Mathematical modeling of heat transfer in the system of ecological diagnostics of diesel locomotive - diluting tunnel]. Visnik of the Volodymyr Dahl East Ukrainian national university, 5(229), 42-50. [in Russian].
 9. Polivyanchuk, A., Ignatov, O. (2012). Issledovanie rezul'tiruyushchej pogreshnosti izmerenij sredneehkspluacionnogo vybroza vzveshennykh chastic s otrabotavshy gazami. [Investigation of the resulting error in measuring the average operating emission of suspended particles with spent gases]. Applied ecology. Collection of scientific works of the Volodymyr Dahl East Ukrainian national university, №1 (4), 73-82. [in Russian].
 10. Polivyanchuk, A. (2012). Ocenka neopredelennosti rezul'tatov izmerenij vybrosov tverdykh chastic v hode ehkologicheskikh ispytaniy dizelej. [Estimation of the uncertainty of the results of measurements of particulate emissions during the environmental tests of diesel engines]. Visnik of the Volodymyr Dahl East Ukrainian national university, №5 (176), 121-128. [in Russian].
 11. Polivyanchuk, A., Zvonov, V. (2005). Pidvyshchennya ekonomichnoyi efektyvnosti ekolohichnykh vyprobuvan' teplovoziv. [Increase of economic efficiency of ecological tests of diesel locomotives]. Collection of scientific works of the Ukrainian State Academy of Railway Transport, 68, 168-176. [in Ukrainian].
 12. Polivyanchuk, A. (2011). Sravnitel'nyj analiz differencial'nogo i kompensacionnogo sposobov izmereniya massovogo raskhoda otrabotavshykh gazov dizelya v mikrotunnele. [Comparative analysis of differential and compensating methods for measuring the mass flow rate of exhaust gases of a diesel engine in a microtunnel]. Internal combustion engines, 2, 123-126. [in Russian].
 13. Polivyanchuk, A., Smirny, M., Holkina, O., Shekhovtsov, Yu. (2015). Analiz metodu dynamichnykh vymiryuvan' kontsentratsiy tverdykh chastynek u vidprats'ovanykh hazakh dyzeliv z optyko-elektrychnym chuttyevym elementom. [Analysis of the method of dynamic measurement of the concentrations of solid particles in the exhaust gases of diesel engines with an opto-electric sensory element]. Internal combustion engines, 1, 52-56. [in Ukrainian].
 14. Polivyanchuk, A., Golovko, N. (2005). Obosnovanie celesoobraznosti primeneniya metodiki uskorennoho zamera pokazatelej toksichnosti otrabotavshykh gazov teplovozov. [Substantiation of expediency of application of a technique of the accelerated measurement of indicators of toxicity of the fulfilled gases of diesel locomotives]. Visnik of the Volodymyr Dahl East Ukrainian national university, №8 (90), 204-209. [in Russian].
 15. Polivyanchuk, A., Zvonov, V. (2000). Izmeritel'nyj kompleks dlya opredeleniya massovykh vybrosov tverdykh chastic dizelej. [Measuring complex for determination of mass emissions of solid particles of diesel engines]. Aerospace engineering and technology. Thermal engines and power installations. collection of scientific papers KhAI, 19, 478-481. [in Russian].
 16. Polivyanchuk, A., Kharitonova, T., Nesmashnaya T. (2007). Povyshenie universal'nosti i tochnosti sistemy kontrolya vybrosov dizel'nykh tverdykh chastic - mikrotunnelya MKT-2. [Increase the universality and accuracy of the control system for emissions of diesel particulate matter - the microtunnel MKT-2]. Aerospace engineering and technology. Thermal engines and power installations. collection of scientific papers KhAI, 9/45, 67-70. [in Russian].

17. Polivyanchuk, A., Kharitonova, T., Chumak, O. (2007). Doslidzhennya efektyvnosti vykorystannya vymiryval'noho kompleksu z mikrotunelem MKT-2 pry provedenni ekolohichnoho diahnostuvannya teplovoziv. [Investigation of the efficiency of using the measuring complex with the microtubule MKT-2 during the ecological diagnostics of diesel locomotives]. Visnik of the Volodymyr Dahl East Ukrainian national university, 8(114), 119-124. [in Ukrainian].
18. Polivyanchuk, A. (2012). Development of a technique and experimental installation for the study of heat transfer in a dilute tunnel of exhaust gases of a diesel engine. [Razrabotka metodiki i ehksperimental'noj ustanovki dlya issledovaniya teplotdachi v razbavlyayushchem tunnele otrabotavshih gazov dizelya]. Internal combustion engines, 1, 93-95. [in Russian].
19. Polivyanchuk, A., Holkina, O. (2015). Issledovanie izokineticheskogo rezhima otbora otrabotavshih gazov dizelya v minitunnele. [Study of the isokinetic regime for the extraction of exhaust gases from a diesel engine in a mini tunnel]. Visnik of the Volodymyr Dahl East Ukrainian national university, 3(220), 82-86. [in Russian].
20. Polivyanchuk, A., Parsadanov, I. (2015). Experimental verification of microtunnel MKT-2 on the brake stand autotractor diesel engine . Industrial technology and engineering. Republic of Kazakhstan, 2(15), 11-16. [in English].
21. Polivyanchuk, A., Parsadanov, I., Holkina, O., Grechishkina, E. (2015). Issledovanie vybrosov tverdyh chastic s otrabotavshimi gazami na neustanovivshihsy rezhimah raboty avtotraktornogo dizelya. [Investigation of emissions of solid particles with exhaust gases at unsteady operating modes of an automotive diesel engine]. Internal combustion engines, 2, 93-97. [in Russian].

Надійшла до редколегії 08.09.2017